




NeuTab N7 Pro Battery Replacement

Use this guide to replace the battery.

Written By: Eric Fiske

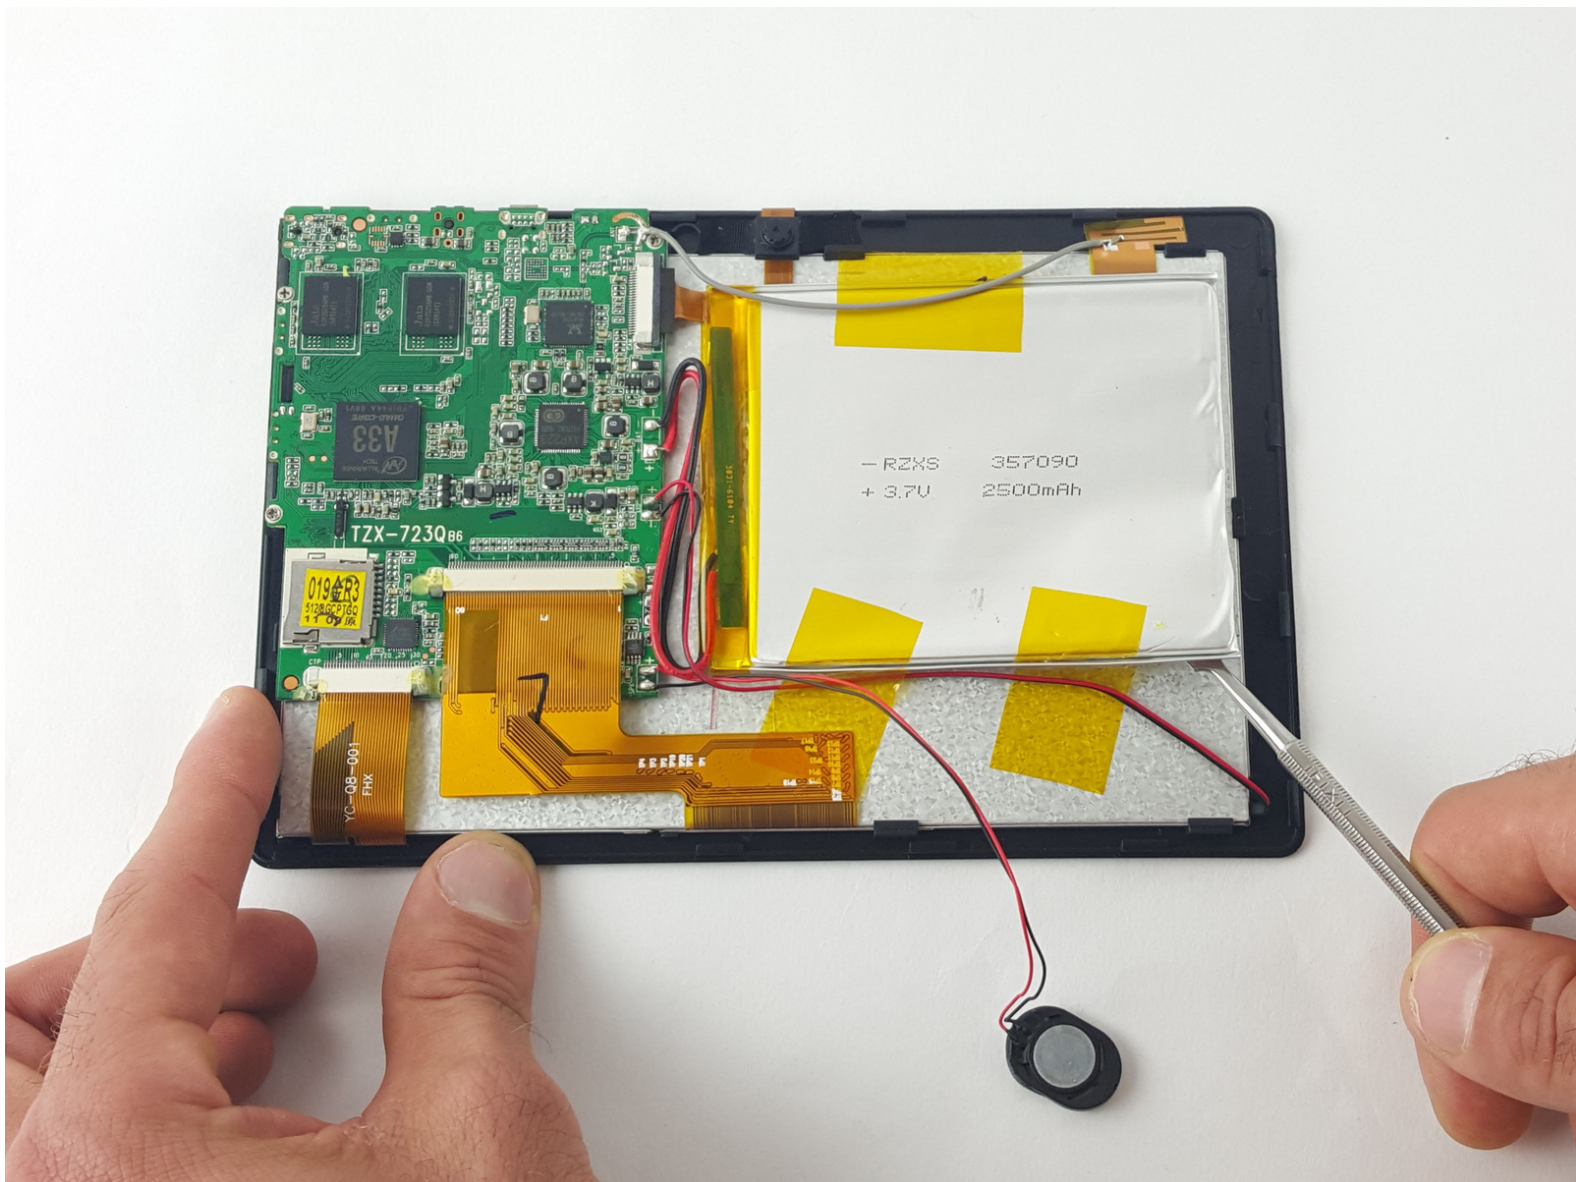

INTRODUCTION

Use this guide to replace the battery.

TOOLS:


- [Soldering Station](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Battery




- ❗ Power off your device before beginning disassembly.
- Insert plastic opening tool and pry back case away from the device, slowly moving the plastic opening tool along the device.

Step 2

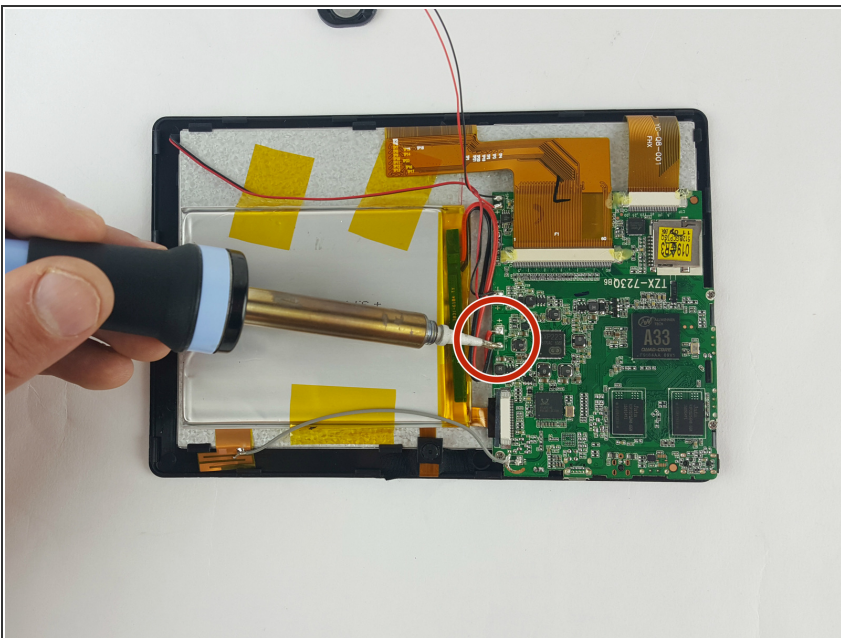

- Follow the red and black wires from the battery to where they are soldered to the motherboard.
- ⚠ Warning: Use caution when handling a soldering iron to avoid injury or damage.
- Use a soldering iron to separate the positive and negative wires from the motherboard.
- ❗ For a complete guide on how to solder, [click here](#).

Step 3

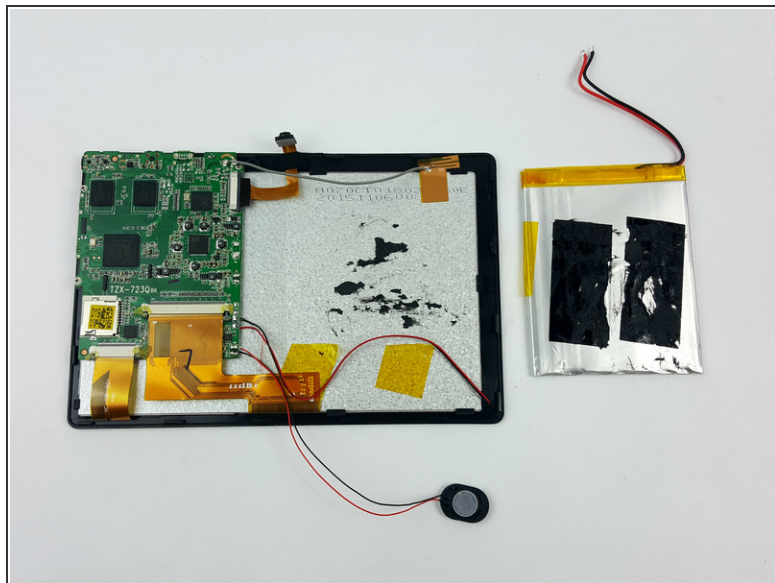

- Insert plastic spudger under the battery and slide back and forth, separating the battery from the case.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 02:25:52 AM.